



AEGLOS UPRIGHT REFRIGERATOR SERIES (AURS)

AURS 高身櫃系列



2/1 GN UPRIGHT REFRIGERATOR

2/1 GN 高身雪櫃



MOBILE BANQUETING REFRIGERATED / HEATED CABINETS

宴會冷、熱車




2/1 GN Upright Refrigerator

2/1 GN 高身櫃系列

伊洛斯冷藏櫃內外採用304不銹鋼製造，堅固可靠。特選鍍鋅底部及背部設計，確保品質同時增加成本效益。櫃室可靈活使用PE層網或2/1和1/1 GN盆，適合不同場合所需。

This Aeglos' 304 series stainless steel exterior and interior allows superior corrosion resistance and cleanability. With a galvanized steel back and base, it delivers high-quality as well as maximized cost savings. Available with PE coated wire shelf or 2/1 GN and 1/1 GN size to suit a wide range of applications.

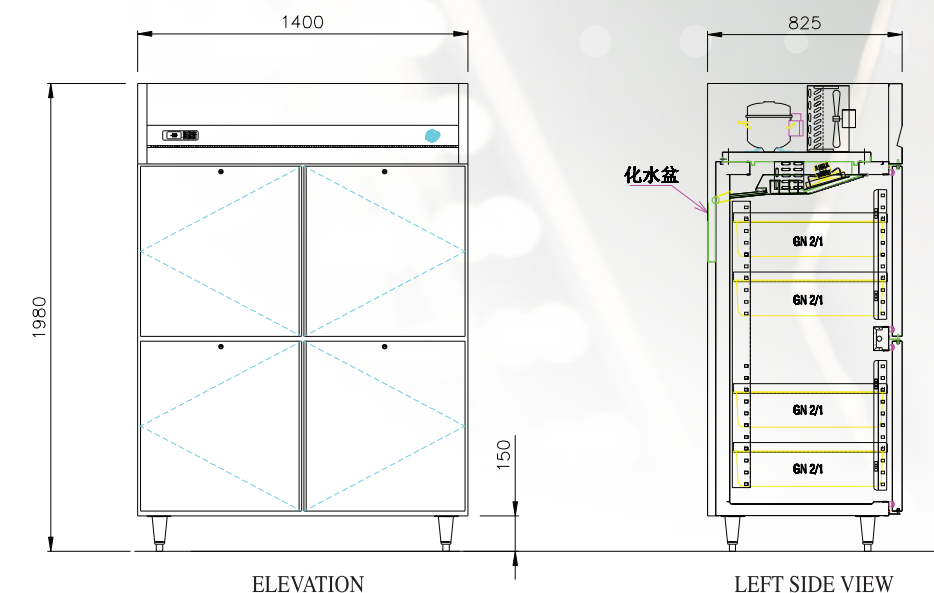

Product Features 產品優點

- 304不銹鋼外殼及內膽
- 鍍鋅底及背
- 採用150mm高的可調子彈腳
- 圓鎖
- 每個櫃室配2對托角和2個PE層網
- 自動化水設計
- 適用於2/1 GN容器
- 數字溫控
- 220v/50Hz
- 304 grade stainless steel exterior and interior
- Galvanized steel back and base
- On 150mm legs
- Lock plate fitted for door
- Each compartment fitted with 2 pairs tray slide and 2 pieces PE coated wire shelf
- Self exaporation condensation water, drainage not required.
- Accommodate 2/1 GN size
- Digital Controller
- 220v/50Hz

Alternative 備選


- 304 不銹鋼背
- 304 不銹鋼底
- 配燈
- 輪子
- 發熱玻璃門
- 雙通門
- 雙通發熱膜玻璃門(不適用於低溫櫃)
- 下門改2抽屜(不適用於低溫櫃)
- 下門改3抽屜(不適用於低溫櫃)
- 220V/60Hz
- 304 stainless steel back
- 304 stainless steel bottom
- Interior light
- Castors
- Heated film glass door
- Double pass through door
- Dual heating film through the glass door [Not applicable to low-temperature refrigerator]
- Bottom door can change to 2 drawers [Not applicable to low-temperature refrigerator]
- Bottom door can change to 3 drawers [Not applicable to low-temperature refrigerator]
- 220V/60Hz

Mobile Banqueting Refrigerated/Heated Cabinets

宴會冷、熱車系列

讓食物的鮮味在運送過程完好保留，以品質作出可信賴的承諾。

A guaranteed choice for you to enjoy smooth and safe transfer of food whether they come in hot or cold.

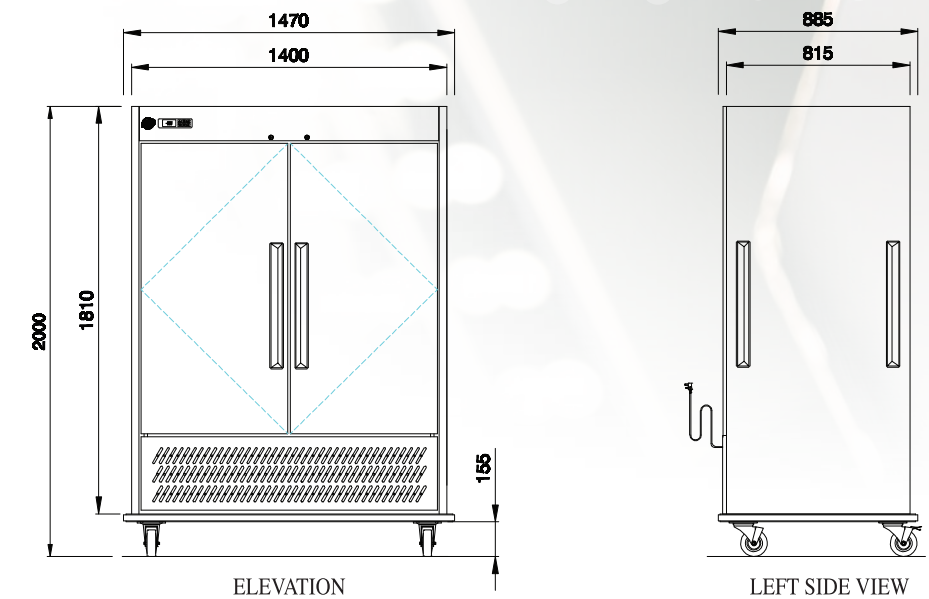

Product Features 產品優點

- 304 不銹鋼外殼及內膽
- 304 不銹鋼底及背
- 155mm高重型旋轉式制動輪子
- 單門配16對托角，雙門配32對托角
- 適用於2/1 GN容器
- 數字溫控
- 220v/50Hz
- 304 grade stainless steel exterior and interior
- 304 grade stainless steel back and base
- On 155mmH Heavy duty swivel and brake castors
- 16 pairs tray slide per section, 32 pairs tray slide per double section
- Accommodate 2/1 GN size
- Digital Controller
- 220v/50Hz

Alternative 備選

- 220V/60Hz
- 220V/60Hz

Aeglos GN Upright Refrigerator Series (AURS)


GN高身櫃系列

產品編碼

Product Code

2G1400-HD-C3

1.1 1.2 2 4.1 4.2

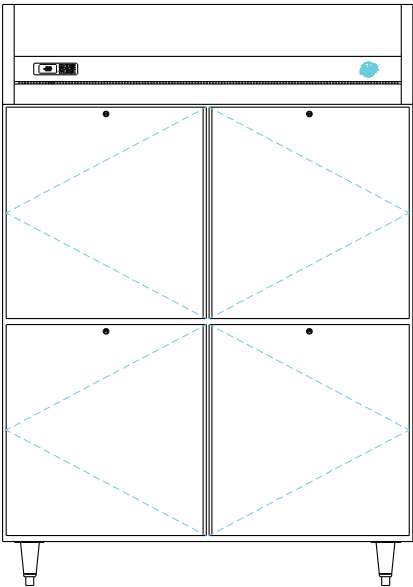

1.1 Sub-Series 子系列

2G = 2/1 GN

1.2 Body Length 櫃身尺寸

2. Configuration 外形

HD = Half Door 半門

FD = Full Door 全門

3. Options 選項

PT = Pass through 雙通門

HGD = Heated film glass door 發熱玻璃門

GD = Glass door 玻璃門

4.1 Temperature Range 溫度

C = +1°C/+4°C

F = -22°C/-18°C

H = +78°C/+82°C

4.2 Material 材質

3 = 304 SS



Aeglos Upright Refrigerator Series (AURS)

2/1 GN UPRIGHT REFRIGERATOR 2/1 GN高身雪櫃

Model No.	2G700-HD-C3	2G700-HD-F3	2G1400-HD-C3	2G1400-HD-F3
Temp Range (°C)	+1~+4	-22~-18	+1~+4	-22~-18
External Dimension (mm) 外尺寸 (毫米)				
Width 寬度	700	700	1400	1400
Depth 深度	825	825	825	825
Height 高度	1980	1980	1980	1980
Internal Dimension (mm) 內尺寸 (毫米)				
Width 寬度	580	580	1280	1280
Depth 深度	673	673	673	673
Height 高度	1380	1380	1380	1380
Thickness of 304 grade stainless steel (mm) 304不銹鋼厚度 (毫米)				
Exterior (外部材料)	0.7	0.7	0.7	0.7
Interior (內部材料)	0.5	0.5	0.5	0.5
Door(門)	0.7	0.7	0.7	0.7
Opening Depth (mm) 打開總深度 (毫米)				
Door type (門)	1475	1475	1475	1475
Capacity (litres) 容積 (公升)	540	540	1190	1190
Power Supply 電壓 220V/50HZ/1PH				
Power Input- Running (amps) 運行時需輸入的電 (安培)	3	4	3.5	4.5
Rating Power (watts) 功率 (瓦特)	430	700	650	1100
Condensing Unit (HP) 機組 (匹)	1/3	1/2	1/3	1
Refrigerant 制冷劑	R134a	R404a	R134a	R404a
Standard fittings for door type 標準配件				
PE coated shelves (pc) 浸塑層網 (件)	4	4	8	8
Trayslides (pair) 托角(對)	4	4	8	8



Aeglos Upright Refrigerator Series (AURS)

MOBILE BANQUETING 流動宴會車				
Model No.	2G807-FD-H3	2G1470-FD-H3	2G807-FD-C3	2G1470-FD-C3
Temp Range (°C)	+78～+82	+78～+82	+1～+4	+1～+4
External Dimension (mm) 外尺寸 (毫米)				
Width 寬度	807	1470	807	1470
Depth 深度	885	885	885	885
Height 高度	1770	1770	2000	2000
Internal Dimension (mm) 內尺寸 (毫米)				
Width 寬度	590	1250	590	1250
Depth 深度	650	650	650	650
Height 高度	1315	1315	1230	1230
Thinkness of 304 grade stainless steel (mm) 304不銹鋼厚度 (毫米)				
Exterior (外部材料)	0.7	0.7	0.7	0.7
Interior (內部材料)	0.5	0.5	0.5	0.5
Door (門)	0.7	0.7	0.7	0.7
Opening Depth (mm) 打開總深度 (毫米)				
Door type (門)	1480	1480	1480	1480
Capacity (litres) 容積(升)	505	1069	472	1000
Power Supply 電壓 220V/50HZ/1PH				
Power Input- Running (amps) 運行時需輸入的電 (安培)	11	17	2.8	3.2
Rating Power (watts) 功率 (瓦特)	2600	3900	438	550
Condensing Unit (HP) 機組 (匹)	N/A	N/A	3/8	3/8
Refrigerant 制冷劑	N/A	N/A	R134a	R134a
Standard fittings 標準配件				
Trayslides (pair) 托角(對)	16	32	16	32

