

NON-GN AEGLOS UPRIGHT REFRIGERATOR SERIES (AURS)

AURS 非GN高身櫃系列



NON-GN UPRIGHT REFRIGERATOR

非GN高身雪櫃



NON-GN UPRIGHT DUAL TEMP REFRIGERATOR

非GN高身雙溫雪櫃




Non-GN Upright Refrigerator

非GN 高身櫃系列

伊洛斯冷藏櫃內外採用不銹鋼製造，堅固可靠。特選鍍鋅底部及背部設計，確保品質同時增加成本效益。

This Aeglos non-GN stainless steel exterior and interior allows superior corrosion resistance and cleanability. With a galvanized steel back and base, it delivers high-quality as well as maximized cost savings.



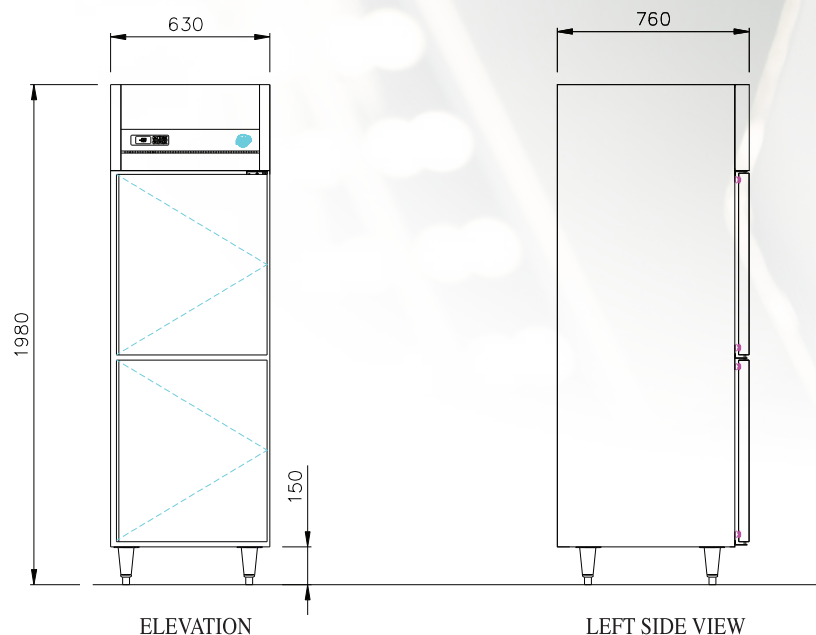

Product Features 產品優點

- 不銹鋼外殼及內膽
- 鍍鋅底及背
- 採用 150mm 高的可調子彈腳
- 自動化水設計
- 數字溫控
- 220v/50Hz
- Stainless steel exterior and interior
- Galvanized steel back and base
- 150mmH Adjustable legs
- Self evaporating condensation water, drainage not required.
- Digital Controller
- 220v/50Hz

Alternative 備選


- 配燈
- 輪子
- 發熱玻璃門
- 雙通門
- 雙通發熱膜玻璃門
- 220V/60Hz
- Interior light
- Castors
- Heated film glass door
- Double pass through door
- Dual heating film through the glass door
- 220V/60Hz


Non-GN Upright Dual Temp Refrigerator

非GN 高身雙溫櫃系列

伊洛斯冷藏櫃內外採用不銹鋼製造，堅固可靠。特選鍍鋅底部及背部設計，確保品質同時增加成本效益。

This Aeglos non-GN stainless steel exterior and interior allows superior corrosion resistance and cleanability. With a galvanized steel back and base, it delivers high-quality as well as maximized cost savings.

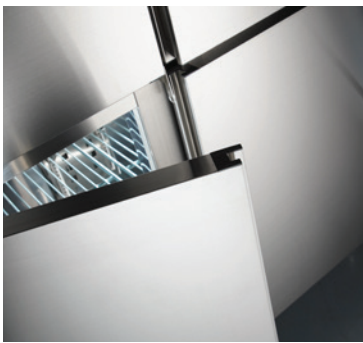

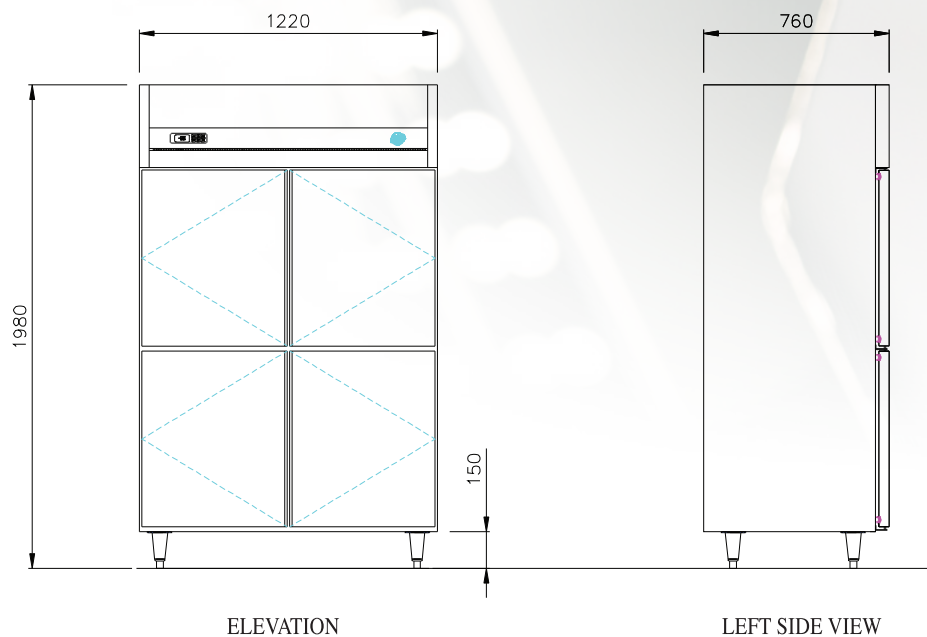

Product Features 產品優點

- 不銹鋼外殼及內膽
- 鍍鋅底及背
- 採用 150mm 高的可調子彈腳
- 櫃門配鎖牌
- 自動化水設計
- 數字溫控
- 220v/50Hz
- Stainless steel exterior and interior
- Galvanized steel back and base
- 150mmH Adjustable legs
- Lock card design
- Self evaporating condensation water, drainage not required.
- Digital Controller
- 220v/50Hz

Alternative 備選

- 配燈
- 發熱膜玻璃門
- 雙通門
- 雙通發熱膜玻璃門
- 輪子
- 圓鎖
- 220V/60Hz
- Interior light
- Heating film glass door
- Double pass through door
- Dual heating film through the glass door
- Castors
- Proprietary cam lock
- 220V/60Hz

Aeglos Non-GN Upright Refrigerator Series (AURS)


非GN高身櫃系列

產品編碼

Product Code

1220-HD-C4

1 2 4.1 4.2

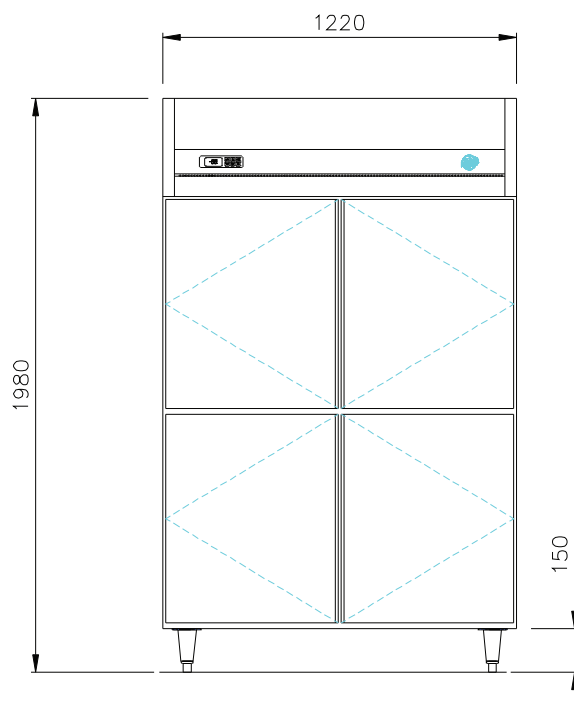

1.1 Body Length 櫃身尺寸

2. Configuration 外形

HD = Half Door 半門

FD = Full Door 全門

3. Options 選項

PT = Pass through 雙通門

HGD = Heated film glass door 發熱玻璃門

GD = Glass door 玻璃門

4.1 Temperature Range 溫度

C = +1°C/+4°C

F = -22°C/-18°C

CF = +1°C/+4°C&-22°C/-18°C

4.2 Material 材質

2 = 201 SS

3 = 304 SS

4 = 430 SS



Non-GN Aeglos Upright Refrigerator Series (AURS)

NON-GN UPRIGHT REFRIGERATOR 非GN高身雪櫃

Model No.	630-HD-C4	630-HD-F4	1220-HD-C4	1220-HD-F4
Temp Range [°C] 溫度 [°C]	+1~+4	-22~-18	+1~+4	-22~-18
External Dimension (mm) 外尺寸 (毫米)				
Width 寬度	630	630	1220	1220
Depth 深度	760	760	760	760
Height 高度	1980	1980	1980	1980
Internal Dimension (mm) 內尺寸 (毫米)				
Width 寬度	520	520	1110	1110
Depth 深度	608	608	608	608
Height 高度	1380	1380	1380	1380
Thickness of stainless steel (mm) 不銹鋼厚度 (毫米)				
Exterior (外部材料)	0.5	0.5	0.5	0.5
Interior (內部材料)	0.5	0.5	0.5	0.5
Door(門)	0.5	0.5	0.5	0.5
Opening Depth (mm) 打開總深度 (毫米)				
Door type (門)	1325	1325	1325	1325
Capacity (litres) 容積 (公升)	426	426	931	931
Power Supply 電壓			220V/50HZ/1PH	
Power Input- Running (amps) 運行時需輸入的電 (安培)	3.3	3.8	3.5	4.2
Rating Power (watts) 功率 (瓦特)	703	780	736	820
Condensing Unit (HP) 機組 (匹)	1/3	1/2	1/3	3/4
Refrigerant 制冷劑	R134a	R404a	R134a	R404a
Standard fittings for door type 標準配件				
PE coated shelves(pc) 浸塑層網(件)	3	3	6	6
Shelf supporters (pc) 碼仔(隻)	12	12	24	24



Non-GN Aeglos Upright Refrigerator Series (AURS)

NON-GN UPRIGHT DUAL TEMP REFRIGERATOR 非GN高身雙溫雪櫃

Model No.	630-HD-CF4	1220-HD-CF4
Temp Range (°C) 溫度 (°C)	+1~+4 & -22~-18	+1~+4 & -22~-18
External Dimension (mm) 外尺寸 (毫米)		
Width 寬度	630	1220
Depth 深度	760	760
Height 高度	1980	1980
Internal Dimension (mm) 內尺寸 (毫米)		
Width 寬度	520	1110
Depth 深度	608	608
Height 高度	1380	1380
Thickness of stainless steel (mm) 不銹鋼厚度 (毫米)		
Exterior (外部材料)	0.5	0.5
Interior (內部材料)	0.5	0.5
Door(門)	0.5	0.5
Opening Depth (mm) 打開總深度 (毫米)		
Door type (門)	1325	1325
Capacity (litres) 容積 (公升)	426	931
Power Supply 電壓 220V/50HZ/1PH		
Power Input- Running (amps) 運行時需輸入的電 (安培)	3A/4A	3.5A/4.5A
Rating Power (watts) 功率 (瓦特)	430/750	650/1100
Condensing Unit (HP) 機組 (匹)	1/3	1/3
Refrigerant 制冷劑	R134a	R134a
Standard fittings for door type 標準配件		
PE coated shelves(pc) 浸塑層網(件)	3	6
Shelf supporters (pc) 碼仔(隻)	12	24

